

OSTROLENK, FABER, GERB & SOFFEN, LLP

Attorneys at Law

1180 Avenue of the Americas  
New York, New York 10036-8403

(212) 382-0700

Telex  
23 6925

Facsimile  
(212) 382-0888

Cable  
Ostrofaber NewYork

Express Mail #EL084182000US

Asst. Commissioner for Patents  
Washington, DC 20231

OFGS File No. : P/1912-18  
Inventor : Hiroshi FURUKAWA et al.  
Title : SPREAD CODE ALLOCATION METHOD AND BASE  
STATION IN CDMA CELLULAR  
Assignee : NEC Corporation

Enclosed herewith please find the following documents in the above-identified application for United States Letters Patent:

☒ Print EFS Data Sheet  
☐ 69 Pages of Specification including Abstract and Claims  
☐ 39 Numbered Claims Calculated as 39 Claims for Fee Purposes  
☐ 12 Sheets of Drawing Containing Figures 1 to 13. (Formal)  
☒ Declaration and Power of Attorney  
☒ Priority is Claimed under 35 U.S.C. §119:

Convention Date November 1, 1999 for Japan Appln. S.N. 11-311603

Certified Priority Application

☐ Verified Statement Claiming Small Entity Status under 37 C.F.R. §1.27  
☒ Assignment  
☒ Return-Addressed Post Card

OFGS Check No. 001857, which includes the fee of \$1,092.00, calculated as follows:


Basic Filing Fee: \$10.00  
Additional Filing Fees:  
Total Number of Claims in Excess of 20, times \$18: \$ 342.00  
Number of Independent Claims in Excess of 3, times \$80: . . .  
One or More Multiple Dependent Claims: Total \$270. . . . .  
Total Filing Fees or . . . . .

Total Filing Fee Reduced 50% for Small Entity: . . . . .  
Assignment Recording Fee: \$40 . . . . . \$ 40.00  
TOTAL Filing Fee and Assignment Recording Fee: . . . . . \$1092.00


In the event the actual fee is greater than the payment submitted or is inadvertently not enclosed, or if any additional fee during the prosecution of this case is not paid, the Patent and Trademark Office is authorized to charge the underpayment to Deposit Account No. 15-0700.

EXPRESS MAIL CERTIFICATE Respectfully submitted,

I hereby certify that this correspondence is being deposited with the United States Postal Service as Express Mail Post Office to Addressee (mail label #EL084182000US) in an envelope addressed to: Asst. Commissioner of Patents & Trademarks, Washington, D.C. 20231, on October 31, 2000:

  
Steven I. Weisburd  
Registration No.: 27,409  
OSTROLENK, FABER, GERB & SOFFEN, LLP  
1180 Avenue of the Americas  
New York, New York 10036-8403  
Telephone: (212) 382-0700

Dorothy Jenkins  
Name of Person Mailing Correspondence

  
Signature  
October 31, 2000

Date of Signature

## INVENTOR INFORMATION

Inventor One Given Name:: Hiroshi  
Family Name:: FURUKAWA  
Postal Address Line One:: c/o NEC Corporation  
Postal Address Line Two:: 7-1, Shiba 5-chome  
City:: Minato-ku  
State or Province:: Toyko  
Country:: Japan  
Citizenship Country:: Japan  
Inventor Two Given Name:: Akihisa  
Family Name:: USHIROKAWA  
Postal Address Line One:: c/o NEC Corporation  
Postal Address Line Two:: 7-1, Shiba 5-chome  
City:: Minato-ku  
State or Province:: Tokyo  
Country:: Japan

## CORRESPONDENCE INFORMATION

Correspondence Customer Number:: 000002352  
Electronic Mail One:: email@ostrolenk.com

## APPLICATION INFORMATION

Title Line One:: SPREAD CODE ALLOCATION METHOD AND BASE  
Title Line Two:: STATION IN CDMA CELLULAR  
Total Drawing Sheets:: 12  
Formal Drawings?: Yes  
Application Type:: Utility  
Docket Number:: P/1912-18  
Secrecy Order in Parent Appl.?: No

## PRIOR FOREIGN APPLICATIONS

Foreign Application One:: 11-311603  
Filing Date:: 11-01-1999  
Country:: Japan  
Priority Claimed:: Yes

Source:: PrintEFS Version 1.0.1

SPREAD CODE ALLOCATION METHOD AND BASE STATION  
IN CDMA CELLULAR

BACKGROUND OF THE INVENTION

5        FIELD OF THE INVENTION

The present invention relates to a spread code allocation method and a base station in a CDMA cellular in which transmission signals directed from a base station to a plurality of mobile stations are spread and transmitted using spreading codes.

10

DESCRIPTION OF THE RELATED ART

On a downlink of a CDMA cellular, transmission signals directed to a plurality of mobile stations are spread and multiplexed by different spreading codes at a base station and then transmitted in the lump. On the downlink, transmission signals can be synchronized with each other with ease because signals directed to the plurality of mobile stations are transmitted from the base station in the lump. It is therefore possible to suppress interference between transmission signals by spreading each transmission signal by a orthogonal synchronization code.

15

20

25

On the other hand, since signals on a downlink from other base stations are hard to be synchronized with each other, employed as a means for suppressing interference from these base stations is a method of multiplying a orthogonal synchronization code by a

scramble code inherent to a base station. Used here as a  
scramble code is a gold code or the like.

Structure of a base station transmission device  
using the present method is shown in Fig. 12. In a  
5 spreading addition device spu shown in Fig. 12, a  
transmission signal  $S_i$  ( $i$ : mobile station number)  
directed to a mobile station and a orthogonal code  $C_o$ ,  $i$   
are multiplied at a multiplier 001, the multiplied  
output signal is added at an adder 002 and the output  
10 signal of the adder 002 is multiplied by a scramble code  
 $C_s$  at the multiplier 001 to output a composite spreading  
signal  $s_d$ . The composite spreading signal  $s_d$  is  
modulated at a modulation device 003 and then  
transmitted from an antenna 004 to each mobile station.

15 Use of the above described diffusion method shown  
in Fig. 12 by all the base stations results in  
randomizing interference of a downlink from other base  
station received at a mobile station, so that together  
with error correcting codes, interference can be  
20 suppressed.

Since code consumption is accelerated in a CDMA  
cellular system for the following reasons, there often  
occur a lack of orthogonal codes.

First, when Soft Hand-Over (SHO) is applied,  
25 because a plurality of base stations transmit the same  
signal for one mobile station, more codes are consumed  
as compared with those consumed when no SHO is applied.

In addition, since in a voiceless period, signal transmission is temporarily stopped to reduce interference, thereby accommodating more mobile stations, more codes are consumed than those in the transmission of information sources being on all the time. Moreover, since code consumption is changed also with propagation environments and in a case where many shielding objects exist on a propagation path or other case, interference of other cells is well suppressed to increase a capacity, code consumption at a base station is increased.

For the foregoing reasons, when more mobile stations are connected to a base station than the number of orthogonal codes, a lack of spreading codes is coped with by the use of a plurality of scramble codes at one base station.

Fig. 13 is a diagram showing a structure of a base station transmission device in a case where a number  $k$  of scramble codes are used. At a spreading addition device  $spu-j$  ( $j$ : scramble code number), a transmission signal  $S_i, h$  ( $h$ : orthogonal code number), a orthogonal code  $Co, h$  and a scramble code  $Cs, j$  are applied to output a composite spreading signal  $sd-j$ .  $n_j$  in Fig. 13 denotes the number of uses of a orthogonal code generated by a  $j$ -th scramble code.

After subjected to addition at an adder 002, the output  $sd-j$  of the composite spreading signal is modulated at a modulation device 003 and then output to

each mobile station through an antenna 004.

In a case where one base station uses a plurality of scramble codes at the same time as shown in Fig. 13, when transmission signals having different required qualities such as a transmission rate and a required bit error rate and transmission signals having different reception qualities dependent on a position of a mobile station within a cell, the amount of interference, etc. are handled at one base station, the degree of interference that each transmission signal received from other transmission signals in the same cell varies due to a difference in a scramble code allocated to cause inequality in communication quality and cause deterioration by interference.

#### SUMMARY OF THE INVENTION

An object of the present invention is to provide a spread code allocation method and a base station in a CDMA cellular enabling control of interference between mobile stations having different required qualities and reception qualities, mitigation of inequality in signal reception qualities at mobile stations and suppression of deterioration by interference caused by inequality by changing priorities of spreading codes according to a required quality and a reception quality.

According to one aspect of the invention, a spread code allocation method in a CDMA cellular,

comprising the steps of

having a first code set including a plurality of first codes and a second code set including one or a plurality of second codes,

5 allocating the second code to the first code set and multiplying the plurality of first codes by the second code allocated to generate a plurality of combined codes,

10 assigning a priority to the combined code for each transmission signal to be transmitted from a base station to a mobile station,

allocating the combined code to the transmission signal based on the priority, and

15 diffusing the transmission signal by the allocated combined code to transmit the transmission signal diffused to the mobile station.

In the preferred construction, the spread code allocation method in a CDMA cellular further comprising the step of,

20 at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station, determining a priority of the combined code based on the channel quality value informed.

25 In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the steps of

at a plurality of the mobile stations, measuring  
a channel quality value and informing the base station  
of the channel quality value and at the base station,  
determining a priority of the combined code based on the  
channel quality value informed, and

setting a priority to the second code according  
to the channel quality value and setting a priority of  
the combined code to be higher as the second code  
attains a higher priority.

In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the steps of

at a plurality of the mobile stations, measuring  
a channel quality value and informing the base station  
of the channel quality value and at the base station,  
determining a priority of the combined code based on the  
channel quality value informed,

setting a priority to the second code according  
to the channel quality value and setting a priority of  
the combined code to be higher as the second code  
attains a higher priority, and

providing an axis of a channel quality value  
representing the channel quality value and dividing the  
axis of a channel quality value by a plurality of  
threshold values to set a channel quality value within  
the same value area among a plurality of value areas  
generated by the division by the threshold values to



have the same priority of the second code.

In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the steps of

5           at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station, determining a priority of the combined code based on the channel quality value informed, and

10           setting a priority to the first code and setting a priority of each combined code in a group of combined codes including the same second code to be higher as the first code attains a higher priority.

15           In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the steps of

20           at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station, determining a priority of the combined code based on the channel quality value informed,

25           setting a priority to the first code and setting a priority of each combined code in a group of combined codes including the same second code to be higher as the first code attains a higher priority, and

          providing an axis of a channel quality value representing the channel quality value and dividing the

axis of a channel quality value by a plurality of  
threshold values to set a channel quality value within  
the same value area among a plurality of value areas  
generated by the division by the threshold values to  
5 have the same priority of the first code.

In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the step of

10 grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
combined code based on the transmission quality required  
amount.

15 In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the steps of

20 grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
combined code based on the transmission quality required  
amount, and

25 setting a priority to the second code according  
to the transmission quality required amount and setting  
a priority of the combined code to be higher as the  
second code attains a higher priority.

In another preferred construction, the spread  
code allocation method in a CDMA cellular further

comprising the steps of

grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
combined code based on the transmission quality required  
amount,

setting a priority to the second code according  
to the transmission quality required amount and setting  
a priority of the combined code to be higher as the  
second code attains a higher priority, and

providing an axis of a transmission quality  
required amount representing the transmission quality  
required amount and dividing the axis of a transmission  
quality required amount by a plurality of threshold  
values to set a transmission quality required amount  
within the same value area among a plurality of value  
areas generated by the division by the threshold values  
to have the same priority of the second code.

In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the steps of

grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
combined code based on the transmission quality required  
amount, and

setting a priority to the first code according to

the transmission quality required amount and setting a priority of each combined code in a group of the combined codes including the same second code to be higher as the first code attains a higher priority.

5           In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the steps of

                  grasping a transmission quality required amount required by a mobile station receiving each the  
10           transmission signal to determine a priority of the combined code based on the transmission quality required amount,

                  setting a priority to the first code according to the transmission quality required amount and setting a  
15           priority of each combined code in a group of the combined codes including the same second code to be higher as the first code attains a higher priority, and

                  providing an axis of a transmission quality required amount representing the transmission quality  
20           required amount and dividing the axis of a transmission quality required amount by a plurality of threshold values to set a transmission quality required amount within the same value area among a plurality of value areas generated by the division by the threshold values  
25           to have the same priority of the first code.

                  In another preferred construction, the spread code allocation method in a CDMA cellular further

comprising the step of

grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
5 combined code based on the transmission quality required  
amount, wherein

a transmission error rate is taken as the  
transmission quality required amount.

10 In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the step of

grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
15 combined code based on the transmission quality required  
amount, wherein

a transmission rate is taken as the transmission  
quality required amount.

20 In another preferred construction, the spread  
code allocation method in a CDMA cellular further  
comprising the step of

grasping a transmission quality required amount  
required by a mobile station receiving each the  
transmission signal to determine a priority of the  
25 combined code based on the transmission quality required  
amount, wherein

the transmission quality required amount is given

by a function of a transmission rate and a transmission error rate.

In another preferred construction, the mobile station measures a channel quality value and informs the base station of the channel quality value, and

the base station checks the number of uses of each second code by a combined code including the same second code and determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code.

In another preferred construction, the mobile station measures a channel quality value and informs the base station of the channel quality value,

the base station checks the number of uses of each second code by a combined code including the same second code and determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code, and which further comprises the steps of

when the channel quality value is not less than a quality threshold value, setting a priority of a combined code to be higher that includes a second code whose the number of uses of each second code by the combined code is smaller, and

when the channel quality value is less than the quality threshold value, setting a priority of a combined code to be higher that includes a second code

whose the number of uses of each second code by the combined code is larger.

In another preferred construction, the mobile station measures a channel quality value and informs the base station of the channel quality value,

the base station checks the number of uses of each second code by a combined code including the same second code and determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code, and which further comprises the step of:

setting a priority to the first code and setting a priority of each combined code in a group of combined codes including the same second code to be higher as the first code attains a higher priority.

In another preferred construction, the transmission signal includes a common control signal.

In another preferred construction, the transmission signal includes a common control signal, and to the common control signal, a combined code having the highest priority is allocated.

In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the step of,

at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station,

determining a priority of the combined code based on the channel quality value informed, wherein

an interference signal power is taken as the channel quality value.

5 In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the step of,

10 at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station, determining a priority of the combined code based on the channel quality value informed, wherein

a reception power of the common control signal is taken as the channel quality value.

15 In another preferred construction, the spread code allocation method in a CDMA cellular further comprising the step of,

20 at a plurality of the mobile stations, measuring a channel quality value and informing the base station of the channel quality value and at the base station, determining a priority of the combined code based on the channel quality value informed, wherein

25 a power ratio of a desired signal to an interference signal is taken as the channel quality value.

In another preferred construction, the spread code allocation method in a CDMA cellular further



comprising the step of

at a plurality of the mobile stations, measuring  
a channel quality value and informing the base station  
of the channel quality value and at the base station,  
5 determining a priority of the combined code based on the  
channel quality value informed, wherein

a power ratio of a desired signal to an  
interference signal is taken as the channel quality  
value, and further comprising the step of:

10 checking a reception power of a common control  
signal sent out from a base station being connected and  
a reception power of the common control signal sent out  
from a base station not being connected to calculate a  
power ratio of a desired signal to an interference  
15 signal from a ratio of a reception power corresponding  
to the base station being connected to a reception power  
corresponding to the base station not being connected.

In another preferred construction, as the first  
code set, a orthogonal code is used.

20 In another preferred construction, as the second  
code set, a gold code or a part of the gold code is used.

According to another aspect of the invention, a  
base station in a CDMA cellular, comprises

25 a first code set including a plurality of first  
codes and a second code set including one or a plurality  
of second codes,

means for allocating the second code to the first

code set and multiplying the plurality of first codes by the second code allocated to generate a plurality of combined codes,

5 means for assigning a priority to the combined code for each transmission signal to be transmitted from a base station to a mobile station,

means for allocating the combined code to the transmission signal based on the priority, and

10 means for diffusing the transmission signal by the allocated combined code to transmit the transmission signal diffused to the mobile station.

15 In the preferred construction, the base station is informed of channel quality values measured at a plurality of the mobile stations to determine a priority of the combined code based on the channel quality values informed.

20 In another preferred construction, the base station is informed of channel quality values measured at a plurality of the mobile stations to determine a priority of the combined code based on the channel quality values informed, and sets a priority to the second code according to the channel quality value and sets a priority of the combined code to be higher as the second code attains a higher priority.

25 In another preferred construction, the base station is informed of channel quality values measured at a plurality of the mobile stations to determine a

priority of the combined code based on the channel  
quality values informed,

5       sets a priority to the second code according to  
the channel quality values and sets a priority of the  
combined code to be higher as the second code attains a  
higher priority, and

10       provides an axis of a channel quality value  
representing the channel quality value and divides the  
axis of a channel quality value by a plurality of  
threshold values to set a channel quality value within  
the same value area among a plurality of value areas  
generated by the division by the threshold values to  
have the same priority of the second code.

15       In another preferred construction, the base  
station is informed of channel quality values measured  
at a plurality of the mobile stations and determines a  
priority of the combined code based on the channel  
quality values informed, and

20       sets a priority to the first code according to  
the channel quality value and sets a priority of each  
combined code in a group of combined codes including the  
same second code to be higher as the first code attains  
a higher priority.

25       In another preferred construction, the base  
station is informed of channel quality values measured  
at a plurality of the mobile stations and determines a  
priority of the combined code based on the channel

quality values informed,

sets a priority to the first code according to the channel quality value and sets a priority of each combined code in a group of combined codes including the same second code to be higher as the first code attains a higher priority, and

provides an axis of a channel quality value representing the channel quality value and divides the axis of a channel quality value by a plurality of threshold values to set a channel quality value within the same value area among a plurality of value areas generated by the division by the threshold values to have the same priority of the first code.

In another preferred construction, the base station grasps a transmission quality required amount required by a mobile station receiving each the transmission signal to determine a priority of the combined code based on the transmission quality required amount.

In another preferred construction, the base station grasps a transmission quality required amount required by a mobile station receiving each the transmission signal to determine a priority of the combined code based on the transmission quality required amount, and

sets a priority to the second code according to the transmission quality required amount and sets a

priority of the combined code to be higher as the second code attains a higher priority.

In another preferred construction, the base station grasps a transmission quality required amount required by a mobile station receiving each the transmission signal to determine a priority of the combined code based on the transmission quality required amount,

sets a priority to the second code according to the transmission quality required amount and sets a priority of the combined code to be higher as the second code attains a higher priority, and

provides an axis of a transmission quality required amount representing the transmission quality required amount and divides the axis of a transmission quality required amount by a plurality of threshold values to set a transmission quality required amount within the same value area among a plurality of value areas generated by the division by the threshold values to have the same priority of the second code.

In another preferred construction, the base station grasps a transmission quality required amount required by a mobile station receiving each the transmission signal to determine a priority of the combined code based on the transmission quality required amount, and

sets a priority to the first code according to

the transmission quality required amount and sets a priority of each combined code in a group of the combined codes including the same second code to be higher as the first code attains a higher priority.

5           In another preferred construction, the base station grasps a transmission quality required amount required by a mobile station receiving each the transmission signal to determine a priority of the combined code based on the transmission quality required amount,

10

          sets a priority to the first code according to the transmission quality required amount and sets a priority of each combined code in a group of the combined codes including the same second code to be higher as the first code attains a higher priority, and

15           provides an axis of a transmission quality required amount representing the transmission quality required amount and divides the axis of a transmission quality required amount by a plurality of threshold

20           values to set a transmission quality required amount within the same value area among a plurality of value areas generated by the division by the threshold values to have the same priority of the first code.

          In another preferred construction, the base station is informed of a channel quality value measured at the mobile station, and

25

          checks the number of uses of each second code by

a combined code including the same second code and determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code.

5           In another preferred construction, the base station is informed of a channel quality value measured at the mobile station,

            checks the number of uses of each second code by a combined code including the same second code and  
10           determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code,

            when the channel quality value is not less than a quality threshold value, sets a priority of a combined  
15           code to be higher that includes a second code whose the number of uses of each second code by the combined code is smaller, and

            when the channel quality value is less than the quality threshold value, sets a priority of a combined  
20           code to be higher that includes a second code whose the number of uses of each second code by the combined code is larger.

            In another preferred construction, the base station is informed of a channel quality value measured  
25           at the mobile station,

            checks the number of uses of each second code by a combined code including the same second code and

determines a priority of the combined code based on the channel quality value informed and the number of uses of each second code, and

5        sets a priority to the first code and sets a priority of each combined code in a group of combined codes including the same second code to be higher as the first code attains a higher priority.

10        Other objects, features and advantages of the present invention will become clear from the detailed description given herebelow.

#### BRIEF DESCRIPTION OF THE DRAWINGS

15        The present invention will be understood more fully from the detailed description given herebelow and from the accompanying drawings of the preferred embodiment of the invention, which, however, should not be taken to be limitative to the invention, but are for explanation and understanding only.

      In the drawings:

20        Fig. 1 is a block diagram showing a base station device to which a spread code allocation method of the present invention is applied;

      Fig. 2 is a flow chart of code allocation processing showing a first embodiment of the present  
25        invention;

      Fig. 3 is a diagram showing one example of a relationship between a channel quality value and channel



quality value classification in a first priority setting example in the combined code allocation according to the first embodiment of the present invention;

5 Fig. 4 is a diagram showing a first priority setting example in the combined code allocation according to the first embodiment of the present invention;

10 Fig. 5 is a diagram showing a first priority setting example in the combined code allocation according to the first embodiment of the present invention;

15 Fig. 6 is a diagram showing one example of classification of transmission quality required amounts with respect to a transmission rate and a transmission error rate in a second priority setting example in the combined code allocation according to the first embodiment of the present invention;

20 Fig. 7 is a diagram showing a second priority setting example in the combined code allocation according to the first embodiment of the present invention;

25 Fig. 8 is a diagram showing a second priority setting example in the combined code allocation according to the first embodiment of the present invention;

Fig. 9 is a diagram showing the number of uses of a scramble code in a third priority setting example in

the combined code allocation according to the first embodiment of the present invention;

Fig. 10 is a diagram showing a third priority setting example in the combined code allocation according to the first embodiment of the present invention;

Fig. 11 is a diagram showing a third priority setting example in the combined code allocation according to the first embodiment of the present invention;

Fig. 12 is a diagram showing a structure of a base station transmission device using conventional singular scramble code spreading;

Fig. 13 is a diagram showing a structure of a base station transmission device using conventional plural scramble codes spreading.

#### DESCRIPTION OF THE PREFERRED EMBODIMENT

The preferred embodiment of the present invention will be discussed hereinafter in detail with reference to the accompanying drawings. In the following description, numerous specific details are set forth in order to provide a thorough understanding of the present invention. It will be obvious, however, to those skilled in the art that the present invention may be practiced without these specific details. In other instance, well-known structures are not shown in detail in order to

unnecessary obscure the present invention.

In the present invention, a priority is given to a spreading code generated by multiplying a scramble code and a orthogonal code and the priority is changed according to a required quality and a reception quality of a mobile station.

Then, by changing a priority of a spreading code according to a required quality and a reception quality, the present invention controls interference between mobile stations having different required qualities and reception qualities to alleviate inequality in signal reception qualities at the mobile stations, thereby suppressing degradation caused by interference derived from inequality.

#### [Description of Structure]

In a spread code allocation method according to a first embodiment of the present invention, a first code set including a plurality of first codes and a second code set including one or a plurality of second codes are provided. Here, the first code corresponds to a orthogonal code and the second code corresponds to a scramble code. As a scramble code, a gold code, a part of the gold code or the like can be used.

Then, allocate the second code to the first code set and multiply the plurality of first codes by the allocated second code to generate a plurality of combined codes. When the combined codes are generated,

allocate the combined codes to transmission signals to be transmitted from a base station to a mobile station, diffuse the transmission signals according to the allocated combined codes and transmit the diffused transmission signals to the mobile station.

In the present invention, a combined code is assigned a priority. Then, a combined code having a higher priority is given preference for allocation to transmission signals. Here, change a priority for each transmission signal. More specifically, change a priority for each transmission signal based on channel quality value information and required quality value information from a mobile station.

In the following, a first embodiment in which the spread code allocation method of the present invention is applied to a base station transmission device will be described with reference to Figs. 1 and 2.

Fig. 1 is a diagram showing a structure of a base station transmission device in a case where a number  $k$  of scramble codes are used.

The first embodiment of the present invention includes a spreading addition device spu- $j$  ( $j$ : scramble code number), an adder 002, a modulation device 003 and an antenna 004.

The spreading addition device spu- $j$  allocates a combined code of a orthogonal code  $C_o$ ,  $h$  and a scramble code  $C_s$ ,  $j$  to a transmission signal  $S_j$ ,  $h$  ( $h$ : orthogonal

code number) to output a composite spreading signal  $sd-j$ .  
 $n_j$  in Fig. 1 denotes the number of uses of a orthogonal  
code generated by a  $j$ -th scramble code. Here,  
transmission signals may include a common control signal.

5           The adder 002 adds each output  $sd-j$  of a  
composite spreading signal.

The modulation device 003 modulates composite  
spreading signals added at the adder 002.

10           The antenna 004 sends out a composite spreading  
signal modulated at the modulation device 003 to each  
mobile station.

15           A feedback information reception unit 005  
receives channel quality information and required  
quality information as feedback information from a  
mobile station through an antenna 006.

20           A priority determination unit 007 receives  
feedback information from the feedback information  
reception unit 005 to determine a priority of a combined  
code for each transmission signal based on the  
information.

[Description of Operation]

Next, operation of the present embodiment will be  
described with reference to Figs. 1 and 2.

25           Fig. 2 shows a flow chart of allocation  
processing at a base station conducted at the time of  
allocating a combined code made up of a orthogonal code  
and a scramble code to a mobile station.

At the processing 101, the base station sets, at a variable  $m_a$ , the number of a mobile station to which a code is to be allocated. At the processing 102, receive transmission of feedback information from the mobile station  $m_a$ . Applied here as the feedback information are channel quality value information such as a reception power of a common control signal and a power ratio of a desired signal to an interference signal and required quality value information such as a transmission rate and a required error rate.

In a case where as a channel quality value, a power ratio of a desired signal to an interference signal is adopted here, the power ratio in question can be calculated by checking a reception power of a common control signal sent out from a base station being connected and checking a reception power of a common control signal sent out from of a base station not being connected to take a ratio of a reception power corresponding to the base station being connected to a reception power corresponding to the base station not being connected.

At the processing 103, set a priority of a combined code based on the feedback information and further at the processing 104, set a priority variable  $p$  to be 1, that is, to be a highest priority. At the processing 106, determine whether the combined code having the priority  $p$  is being used or not and when the

combined code of the priority p is in use, add 1 to the priority variable p at the processing 105 to return to the processing 106.

5 When the determination is made at the processing 106 that the combined code having the priority p is not in use, allocate the combined code of the priority p to the mobile station ma at the processing 107 and notify the allocated combined code information from the base station to the mobile station ma to complete the code allocation processing.

10 A transmission signal to be transmitted from the base station to the mobile station using an allocated code may include a common control signal and in this case, the common control signal is preferably allocated a combined code whose priority is the highest.

15 [First Examples of Priority Setting]

20 Figs. 3, 4 and 5 show examples of setting of a priority of each combined code conducted at the priority determination unit 007 at the processing 103 of Fig. 2 according to the first embodiment of the present invention. In this example, priority is set based on a channel quality value.

25 The abscissa of Fig. 3 represents a channel quality value observed by a mobile station and the channel quality values are divided by several threshold values as shown in Fig. 3. Among possible channel quality values are an interference power observed at the

mobile station, a reception power of a common control  
signal received by the mobile station and a power ratio  
of a desire signal to an interference signal. These  
channel quality values measured by the mobile station  
5 are transmitted to the base station at the processing  
102 of Fig. 2.

As illustrated in Fig. 3, to a plurality of value  
areas divided by the threshold values, channel quality  
value class are set. As a result, to approximately the  
10 same channel quality value, an equal channel quality  
value class is applied. According to a channel quality  
value observed at the mobile station, a channel quality  
value class is selected from Fig. 3.

At the base station, the priority determination  
15 unit 007 determines a priority of a combined code based  
on the channel quality values, more specifically, for  
each channel quality value class. At that time, the unit  
007 determines the priority of the combined code by  
assigning a priority to a scramble code as a second code  
20 or a priority to a first code which is a orthogonal code  
and a second code. At that time, for each channel  
quality value class, set the priority of the scramble  
code or the priorities of the scramble code and the  
orthogonal code to be the same.

25 Figs. 4 and 5 show examples of setting of a  
priority of each combined code in the channel quality  
value classes Q1 and Q2. The abscissa in each table



shown in Figs. 4(a) and (b) and 5(a) and (b) represents the number of a scramble code and the ordinate represents the number of a orthogonal code and each element in the tables represents a priority of each combined code.

In the example of Fig. 4, the scramble codes are given priorities which are changed according to channel quality values. In Fig. 4(a), the priority of the scramble code 1 is set to be 1 and the priority of the scramble code 2 is set to be 2, while in Fig. 4(b), the priority of the scramble code 1 is set to be 2 and the priority of the scramble code 2 set to be 1. Then, the higher the priority of a scramble code is, the higher the priority of a combined code is set to be.

As a result, a group of combined codes including the scramble code 1 in Fig. 4(a) is assigned the priorities 1 to 8, a group of combined codes including the scramble code 2 in Fig. 4(a) is assigned the priorities 9 to 16, a group of combined codes including the scramble code 1 in Fig. 4(b) is assigned the priorities 9 to 16, and a group of combined codes including the scramble code 2 in Fig. 4(b) is assigned the priorities 1 to 8. In this example, no orthogonal code is assigned a priority and to each scramble code, a orthogonal code is assigned at random.

In the example of Fig. 5, similarly to the example of Fig. 4, the scramble codes are given

priorities which are changed according to channel quality values. In Fig. 5(a), the priority of the scramble code 1 is set to be 1 and the priority of the scramble code 2 is set to be 2, while in Fig. 5(b), the priority of the scramble code 1 is set to be 2 and the priority of the scramble code 2 is set to be 1. Then, the higher the priority of a scramble code is, the higher the priority of a combined code is set to be.

As a result, a group of combined codes including the scramble code 1 in Fig. 5(a) is assigned the priorities 1 to 8, a group of combined codes including the scramble code 2 in Fig. 5(a) is assigned the priorities 9 to 16, a group of combined codes including the scramble code 1 in Fig. 5(b) is assigned the priorities 9 to 16, and a group of combined codes including the scramble code 2 in Fig. 5(b) is assigned the priorities 1 to 8.

Furthermore, in this example, a orthogonal code is assigned a priority. More specifically, in Fig. 5(a) and (b), the orthogonal codes 1, 2, ..., 8 are assigned orthogonal code priorities 1, 2, ... 8, respectively. Then, the higher the priority of the orthogonal code is, the higher the priority of the combined code is set to be.

More specifically, the priorities of the group of combined codes including the scramble code 1 in Fig. 5(a) are set to be 1, 2, ..., 8 for the combined codes

(1, 1), (1, 2) ... (1, 8)(scramble code number,  
orthogonal code number), respectively. Priorities of the  
group of combined codes including the scramble code 2  
are set to be 9, 10, ..., 16 for the combined codes (2,  
1), (2, 2) ... (2, 8), respectively. Also, priorities of  
the group of combined codes including the scramble code  
1 in Fig. 5(b) are set to be 9, 10, ..., 16 for the  
combined codes (1, 1), (1, 2) ... (1, 8), respectively.  
Priorities of the group of combined codes including the  
scramble code 2 are set to be 1, 2, ..., 8 for the  
combined codes (2, 1), (2, 2) ... (2, 8), respectively.

Although in the examples of Fig. 5(a) and (b),  
priorities of the orthogonal codes are uniformly  
determined, they may be changed according to channel  
quality values similarly to the scramble codes.  
[Effect]

When transmission power control on a downlink is  
applied, transmission power directed to each mobile  
station changes with a channel quality, and difference  
in transmission power causes inequality in the amount of  
interference from other downward transmission signals  
received by each mobile station. According to the  
present embodiment, priority of a combined code is  
changed with a channel quality value class, and  
allocation of a transmission signal and a combined code  
is classified according to a channel quality as shown in  
Figs. 4 and 5. As a result, inequality of a call

reception quality at each mobile station derived from a difference in a channel quality is suppressed.

When common control signal reception power is used as a channel quality value, in particular, the following interference reduction effect can be expected.

According to the present embodiment shown in Figs. 3, 4 and 5, equal scramble codes are assigned to a mobile station having approximately the same common control signal reception power, that is, to a mobile station having approximately the same propagation loss between a base station and a mobile station. Between transmission signals allocated the same scramble code, interference therebetween is reduced because the same orthogonal code set is assigned.

In a case where transmission power control is conducted, a transmission signal directed to a mobile station having a low common control signal reception power, that is, a transmission signal directed to a mobile station having a large loss of propagation up to the base station, is discharged from the base station with a large output which will cause large interference to other radio lines. According to the present embodiment shown in Figs. 3, 4 and 5, since the transmission signals in question are assigned a combined code including the same orthogonal code set, interference between the transmission signals in question can be suppressed.

On the other hand, to a transmission signal directed to a mobile station having a high common control signal reception power, that is, to a transmission signal directed to a mobile station having a small loss of propagation up to the base station, a transmission power for compensating for a propagation loss can be set to be small. Thus, it is possible to set, at a transmission signal having a margin for transmission power setting, a transmission power high enough to overcome large interference received from a transmission signal directed to a mobile station whose common control signal reception power is small, so that reduction in interference is expected.

[Second Example of Priority Setting]

Fig. 6 shows a second example of setting of a priority of each combined code conducted at the priority determination unit 007 of the base station at the processing 102 of Fig. 1 according to the first embodiment of the present invention. In this example, priority is set based on a transmission quality required amount. Possible transmission quality required amount includes a transmission rate, a transmission error rate, a function of a transmission rate and a transmission error rate.

The abscissa and ordinate of Fig. 6 represent a transmission rate and a transmission error rate required by a mobile station, respectively. 1-1, 1-2, 1-3 and 1-4

in Fig. 6 are boundary lines for defining transmission quality required amount classes  $Q_0 - a$  to  $Q_0 - i$ . These transmission quality required amounts required by the mobile station are transmitted to the base station at the processing 102 of Fig. 2. In Fig. 6, to approximately the same transmission rate and transmission error rate, equal transmission quality required amount class is applied.

Based on a transmission quality required amount requested by the mobile station and according to a transmission rate of a transmission signal and a transmission error rate required of the transmission signal in question, a transmission quality required amount class is selected from Fig. 6.

At the base station, the priority determination unit 007 determines a priority of a combined code based on the transmission quality required amounts, more specifically, for each transmission quality required amount class. At that time, the unit 007 determines the priority of the combined code by assigning a priority to a scramble code as a second code or priority to a first code which is a orthogonal code and a second code. At that time, for each transmission quality required amount class, set the priority of the scramble code or the priorities of the scramble code and the orthogonal code to be the same.

Figs. 7 and 8 show examples of setting of a

priority of each combined code in the transmission  
quality required amount classes  $Q_0 - a$  and  $Q_0 - b$ . The  
abscissa in each table shown in Figs. 7(a) and (b) and  
8(a) and (b) represents the number of a scramble code  
and the ordinate represents the number of a orthogonal  
code and each element in the tables represents a  
priority of each combined code.

The transmission quality required amount class  $Q_0 - b$  is premised on transmission faster than that of  $Q_0 - a$ , in which an amount occupied by codes per call is set to be larger than that of  $Q_0 - a$ . As a code generation method realizing such high-speed transmission, well known is a method using a plurality of orthogonal codes simultaneously and a method using a hierarchical orthogonal code.

In the example of Fig. 7, the scramble codes are given priorities which are changed according to a transmission quality required amount. In Fig. 7(a), the priority of the scramble code 1 is set to be 1 and the priority of the scramble code 2 is set to be 2, while in Fig. 7(b), the priority of the scramble code 1 is set to be 2 and the priority of the scramble code 2 set to be 1. Then, the higher the priority of a scramble code is, the higher the priority of a combined code is set to be.

As a result, a group of combined codes including the scramble code 1 in Fig. 7(a) is assigned the priorities 1 to 8, a group of combined codes including

the scramble code 2 in Fig.7(a) is assigned the priorities 9 to 16, a group of combined codes including the scramble code 1 in Fig. 7(b) is assigned the priorities 5 to 8 and a group of combined codes including the scramble code 2 in Fig. 7(b) is assigned the priorities 1 to 4. In this example, no orthogonal code is assigned a priority and to each scramble code, a orthogonal code is assigned at random.

In the example of Fig. 8, similarly to the example of Fig. 7, the scramble codes are given priorities which are changed according to a transmission quality required amount. In Fig. 8(a), the priority of the scramble code 1 is set to be 1 and the priority of the scramble code 2 is set to be 2, while in Fig. 8(b), the priority of the scramble code 1 is set to be 2 and the priority of the scramble code 2 is set to be 1. Then, the higher the priority of a scramble code is, the higher the priority of a combined code is set to be.

As a result, a group of combined codes including the scramble code 1 in Fig. 8(a) is assigned the priorities 1 to 8, a group of combined codes including the scramble code 2 in Fig. 8(a) is assigned priorities 9 to 16, a group of combined codes including the scramble code 1 in Fig. 8(b) is assigned the priorities 5 to 8 and a group of combined codes including the scramble code 2 in Fig. 8(b) is assigned the priorities 1 to 4.



Furthermore, in this example, a orthogonal code is assigned a priority. More specifically, in Fig. 8(a), the orthogonal codes 1, 2, ..., 8 are assigned orthogonal code priorities 1, 2, ... 8, respectively. In Fig. 8(b), the orthogonal codes 1 and 2, 3 and 4, 5 and 6, and 7 and 8 are assigned orthogonal code priorities 1, 2, 3 and 4, respectively.

Then, the higher the priority of the orthogonal code is, the higher the priority of the combined code is set to be. More specifically, the priorities of the group of combined codes including the scramble code 1 in Fig. 8(a) are set to be 1, 2, ..., 8 for the combined codes (1, 1), (1, 2)... (1, 8) (scramble code number, orthogonal code number), respectively. Priorities of the group of combined codes including the scramble code 2 are set to be 9, 10, ..., 16 for the combined codes (2, 1), (2, 2) ... (2, 8), respectively.

Also, priorities of the group of combined codes including the scramble code 1 in Fig. 8(b) are set to be 5, 6, 7 and 8 for the combined codes (1, 1&2), (1, 3&4), (1, 5&6) and (1, 7&8), respectively. Priorities of the group of combined codes including the scramble code 2 are set to be 1, 2, 3 and 4 for the combined codes (2, 1&2), (2, 3&4), (2, 5&6) and (2, 7&8), respectively.

Here, the combined code (A, B&C) indicates that orthogonal codes B and C are simultaneously used for the scramble code A.

[Effect]

As described in Figs. 6, 7 and 8, in the present embodiment, a priority of a combined code is changed according to a transmission quality required amount class. Thus changing a priority of a combined code according to a transmission quality required amount given by a transmission rate, a transmission error rate, etc., allocation of transmission signals and combined codes is classified according to a transmission rate and a transmission error rate.

In general, the higher a transmission speed of a transmission signal is, or the lower an error rate required by a transmission signal is, the more power the transmission needs. By allocating an equal scramble code to these transmission signals which can exert large interference to other signals, interference between the relevant transmission signals can be suppressed.

On the other hand, although a transmission signal allowing low-speed transmission or a high error rate receives large interference from a transmission signal which is assigned a different scramble code and requires high-speed transmission or a low error rate, because required transmission power of the transmission signal allowing low-speed transmission or a high error rate is low, application of transmission power control overcomes the large interference. In addition, assigning a scramble code according to a transmission rate or an

error rate enables suppression of inequality in received call quality.

[Third Example of Priority Setting]

5 Figs. 9, 10 and 11 show a third example of setting of a priority of each combined code conducted at the priority determination unit 007 of the base station at the processing 102 of Fig. 1 according to the first embodiment of the present invention. In this example, priority is set based on a channel quality value and the number of uses of a second code.

10 First, the base station checks the number of uses of each scramble code by a combined code in advance. Fig. 9 shows one example of the result, in which the abscissa represents the number of a scramble code and the ordinate represents the number of uses of each scramble code. Fig. 9 is premised on that the second scramble code is most frequently used and the fourth scramble code is least frequently used.

15 The base station determines a priority of a combined code based on the number of uses of the relevant scramble code and a channel quality value transmitted from a mobile station. Here, as channel quality values, interference power observed at the mobile station, a common control signal reception power at the mobile station and a power ratio of a desired signal to an interference signal are applied and the channel quality value information is transmitted from

20

25

the mobile station to the base station at the processing  
108 in Fig. 1.

Figs. 10 and 11 show examples of setting of a  
priority of each combined code under the condition of  
the number of uses of a scramble code given in Fig. 9.  
In each table, the ordinate represents the number of a  
orthogonal code and the abscissa represents the number  
of a scramble code.

In the example of Fig. 10, when the channel  
quality value transmitted from the mobile station is not  
less than a quality threshold value, set the highest  
priority to a scramble code which is least frequently  
used under the given condition of the number of uses of  
a scramble code as shown in Fig. 10(a).

More specifically, set the priority of the  
scramble code 4 to be 1, that of the scramble code 3 to  
be 2, that of the scramble code 1 to be 3 and that of  
the scramble code 2 to be 4. Then, the higher the  
priority of the scramble code is, the higher the  
priority of a combined code is set to be. As a result,  
to a group of combined codes including the scramble code  
1 in Fig. 10(a), priorities 17 to 24 are allocated, to a  
group of combined codes including the scramble code 2,  
priorities 25 to 32 are allocated, to a group of  
combined codes including the scramble code 3, priorities  
9 to 16 are allocated and to a group of combined codes  
including the scramble code 4, priorities 1 to 8 are

allocated.

On the other hand, when the channel quality value transmitted from the mobile station is less than the quality threshold value, set the highest priority to a scramble code which is most frequently used under the given condition of the number of uses of a scramble code as shown in Fig. 10(b).

More specifically, set the priority of the scramble code 2 to be 1, that of the scramble code 1 to be 2, that of the scramble code 3 to be 3 and that of the scramble code 4 to be 4. Then, the higher the priority of the scramble code is, the higher the priority of a combined code is set to be. As a result, to a group of combined codes including the scramble code 1 in Fig. 10(b), priorities 9 to 16 are allocated, to a group of combined codes including the scramble code 2, priorities 1 to 8 are allocated, to a group of combined codes including the scramble code 3, priorities 17 to 24 are allocated and to a group of combined codes including the scramble code 4, priorities 25 to 32 are allocated.

In this example, no priority is assigned to a orthogonal code and for each scramble code, a orthogonal code is allocated at random.

In the example of Fig. 11, similarly to the case of Fig. 10, when the channel quality value transmitted from the mobile station is not less than a quality threshold value, set the highest priority to a scramble

code which is least frequently used under the given condition of the number of uses of a scramble code as shown in Fig. 11(a).

More specifically, set the priority of the  
5 scramble code 4 to be 1, that of the scramble code 3 to be 2, that of the scramble code 1 to be 3 and that of the scramble code 2 to be 4. Then, the higher the priority of the scramble code is, the higher the  
10 priority of a combined code is set to be. As a result, to a group of combined codes including the scramble code 1 in Fig. 11(a), priorities 17 to 24 are allocated, to a group of combined codes including the scramble code 2, priorities 25 to 32 are allocated, to a group of  
15 combined codes including the scramble code 3, priorities 9 to 16 are allocated and to a group of combined codes including the scramble code 4, priorities 1 to 8 are allocated.

On the other hand, when the channel quality value transmitted from the mobile station is less than the  
20 quality threshold value, set the highest priority to a scramble code which is most frequently used under the given condition of the number of uses of a scramble code as shown in Fig. 11(b).

More specifically, set the priority of the  
25 scramble code 2 to be 1, that of the scramble code 1 to be 2, that of the scramble code 3 to be 3 and that of the scramble code 4 to be 4. Then, the higher the

priority of the scramble code is, the higher the priority of a combined code is set to be. As a result, to a group of combined codes including the scramble code 1 in Fig. 11(b), priorities 9 to 16 are allocated, to a group of combined codes including the scramble code 2, priorities 1 to 8 are allocated, to a group of combined codes including the scramble code 3, priorities 17 to 24 are allocated and to a group of combined codes including the scramble code 4, priorities 25 to 32 are allocated.

In the example of Fig. 11, priority is allocated also to a orthogonal code. More specifically, priorities of the orthogonal codes 1, 2, ..., 8 are set to be 1, 2, ... 8, respectively. Then, the higher the priority of a orthogonal code is, the higher the priority of a combined code is set to be.

More specifically, priorities of a group of combined codes including the scramble code 1 in Fig. 11(a) are set to be 17, 18, ..., 24 for combined codes (1, 1), (1, 2) ... (1, 8) (scramble code number, orthogonal code number), respectively, priorities of a group of combined codes including the scramble code 2 are set to be 25, 26, ..., 32 for combined codes (2, 1), (2, 2) ... (2, 8), priorities of a group of combined codes including the scramble code 3 are set to be 9, 10, ..., 16 for combined codes (3, 1), (3, 2) ..., (3, 8) and priorities of a group of combined codes including the scramble code 4 are set to be 1, 2, ..., 8 for

combined codes (4, 1), (4, 2) ... (4, 8).

Also, priorities of a group of combined codes including the scramble code 1 in Fig. 11(b) are set to be 9, 10, ..., 16 for combined codes (1, 1), (1, 2) ... (1, 8), respectively, priorities of a group of combined codes including the scramble code 2 are set to be 1, 2, ..., 8 for combined codes (2, 1), (2, 2) ... (2, 8), priorities of a group of combined codes including the scramble code 3 are set to be 17, 18, ..., 24 for combined codes (3, 1), (3, 2) ..., (3, 8) and priorities of a group of combined codes including the scramble code 4 are set to be 25, 26, ..., 32 for combined codes (4, 1), (4, 2) ... (4, 8).

Although in the examples of Fig. 11(a) and (b), priority of a orthogonal code is uniformly determined, it may be changed according to the number of uses of each orthogonal code by a combined code similarly to a case of a scramble code.

[Effect]

Between signals allocated different scramble codes, the amount of interference therebetween is large because orthogonality of the codes can not be maintained. A transmission signal allocated a scramble code which is less frequently used, in particular, receives large interference from a transmission signal allocated a scramble signal whose frequency of use is high.

In a case where transmission power control is



applied, when a channel quality value is a quality threshold value, that is, when reception quality at a mobile station is excellent, transmission power directed to the mobile station in question can be set low. In this case, as shown in Figs. 9, 10 and 11, even if a combined code including a scramble code whose frequency of use is low is allocated to the mobile station having a high channel quality value, a transmission signal directed to the mobile station in question is allowed to endure interference without reaching its maximum transmission power. As a result, degradation due to interference can be suppressed.

Although the foregoing description has been made of an application of the spread code allocation method of the present invention to a base station device as an example, it is clearly understood that the method can be realized not only at a base station device but also at a control station and an exchange.

As described in the foregoing, according to the present invention, by changing a priority of a spreading code according to required quality or reception quality at a mobile station, inequality of call reception quality at the mobile stations can be suppressed to reduce interference.

Although the invention has been illustrated and described with respect to exemplary embodiment thereof, it should be understood by those skilled in the art that

the foregoing and various other changes, omissions and additions may be made therein and thereto, without departing from the spirit and scope of the present invention. Therefore, the present invention should not be understood as limited to the specific embodiment set out above but to include all possible embodiments which can be embodied within a scope encompassed and equivalents thereof with respect to the feature set out in the appended claims.

5

WHAT IS CLAIMED IS:

1. A spread code allocation method in a CDMA cellular, comprising the steps of:

having a first code set including a plurality of first codes and a second code set including one or a plurality of second codes,

allocating the second code to said first code set and multiplying said plurality of first codes by said second code allocated to generate a plurality of combined codes,

assigning a priority to said combined code for each transmission signal to be transmitted from a base station to a mobile station,

allocating said combined code to said transmission signal based on said priority, and

diffusing said transmission signal by the allocated combined code to transmit said transmission signal diffused to said mobile station.

2. The spread code allocation method in a CDMA cellular as set forth in claim 1, further comprising the step of,

at a plurality of said mobile stations, measuring a channel quality value and informing said base station of said channel quality value and at said base station, determining a priority of said combined code based on

said channel quality value informed.

3. The spread code allocation method in a CDMA cellular as set forth in claim 1, further comprising the steps of:

at a plurality of said mobile stations, measuring  
5 a channel quality value and informing said base station  
of said channel quality value and at said base station,  
determining a priority of said combined code based on  
said channel quality value informed, and

setting a priority to said second code according  
10 to said channel quality value and setting a priority of  
said combined code to be higher as said second code  
attains a higher priority.

4. The spread code allocation method in a CDMA cellular as set forth in claim 1, further comprising the steps of:

at a plurality of said mobile stations, measuring  
5 a channel quality value and informing said base station  
of said channel quality value and at said base station,  
determining a priority of said combined code based on  
said channel quality value informed,

setting a priority to said second code according  
10 to said channel quality value and setting a priority of  
said combined code to be higher as said second code  
attains a higher priority, and

providing an axis of a channel quality value  
representing said channel quality value and dividing the  
axis of a channel quality value by a plurality of  
threshold values to set a channel quality value within  
the same value area among a plurality of value areas  
generated by the division by said threshold values to  
have the same priority of said second code.

5. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

at a plurality of said mobile stations, measuring  
a channel quality value and informing said base station  
of said channel quality value and at said base station,  
determining a priority of said combined code based on  
said channel quality value informed, and

setting a priority to said first code and setting  
a priority of each combined code in a group of combined  
codes including the same second code to be higher as  
said first code attains a higher priority.

6. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

at a plurality of said mobile stations, measuring  
a channel quality value and informing said base station  
of said channel quality value and at said base station,

determining a priority of said combined code based on  
said channel quality value informed,

10        setting a priority to said first code and setting  
a priority of each combined code in a group of combined  
codes including the same second code to be higher as  
said first code attains a higher priority, and

15        providing an axis of a channel quality value  
representing said channel quality value and dividing the  
axis of a channel quality value by a plurality of  
threshold values to set a channel quality value within  
the same value area among a plurality of value areas  
generated by the division by said threshold values to  
have the same priority of said first code.

20        7.        The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
step of

5               grasping a transmission quality required amount  
required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount.

8.        The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

         grasping a transmission quality required amount

5 required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount, and

10 setting a priority to said second code according  
to said transmission quality required amount and setting  
a priority of said combined code to be higher as said  
second code attains a higher priority.

9. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

5 grasping a transmission quality required amount  
required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount,

10 setting a priority to said second code according  
to said transmission quality required amount and setting  
a priority of said combined code to be higher as said  
second code attains a higher priority, and

15 providing an axis of a transmission quality  
required amount representing said transmission quality  
required amount and dividing the axis of a transmission  
quality required amount by a plurality of threshold  
values to set a transmission quality required amount  
within the same value area among a plurality of value

20 areas generated by the division by said threshold values  
to have the same priority of said second code.

10. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

5 grasping a transmission quality required amount  
required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount, and

10 setting a priority to said first code according  
to said transmission quality required amount and setting  
a priority of each combined code in a group of said  
combined codes including the same second code to be  
higher as said first code attains a higher priority.

11. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
steps of:

5 grasping a transmission quality required amount  
required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount,

10 setting a priority to said first code according  
to said transmission quality required amount and setting



a priority of each combined code in a group of said combined codes including the same second code to be higher as said first code attains a higher priority, and

providing an axis of a transmission quality  
15 required amount representing said transmission quality  
required amount and dividing the axis of a transmission  
quality required amount by a plurality of threshold  
values to set a transmission quality required amount  
within the same value area among a plurality of value  
20 areas generated by the division by said threshold values  
to have the same priority of said first code.

12. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
step of

grasping a transmission quality required amount  
5 required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount, wherein

a transmission error rate is taken as said  
10 transmission quality required amount.

13. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
step of

grasping a transmission quality required amount

5 required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount, wherein

10 a transmission rate is taken as said transmission  
quality required amount.

14. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
step of

5 grasping a transmission quality required amount  
required by a mobile station receiving each said  
transmission signal to determine a priority of said  
combined code based on said transmission quality  
required amount, wherein

10 said transmission quality required amount is  
given by a function of a transmission rate and a  
transmission error rate.

15. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, wherein

5 said mobile station measures a channel quality  
value and informs said base station of said channel  
quality value, and

said base station checks the number of uses of  
each second code by a combined code including the same  
second code and determines a priority of said combined

code based on said channel quality value informed and  
said number of uses of each second code.

16. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, wherein

said mobile station measures a channel quality  
value and informs said base station of said channel  
quality value,

said base station checks the number of uses of  
each second code by a combined code including the same  
second code and determines a priority of said combined  
code based on said channel quality value informed and  
said number of uses of each second code, and which  
further comprises the steps of:

when said channel quality value is not less than  
a quality threshold value, setting a priority of a  
combined code to be higher that includes a second code  
whose said number of uses of each second code by said  
combined code is smaller, and

when said channel quality value is less than said  
quality threshold value, setting a priority of a  
combined code to be higher that includes a second code  
whose said number of uses of each second code by said  
combined code is larger.

17. The spread code allocation method in a CDMA  
cellular as set forth in claim 1, wherein

said mobile station measures a channel quality value and informs said base station of said channel quality value,

said base station checks the number of uses of each second code by a combined code including the same second code and determines a priority of said combined code based on said channel quality value informed and said number of uses of each second code, and which further comprises the step of:

setting a priority to said first code and setting a priority of each combined code in a group of combined codes including the same second code to be higher as said first code attains a higher priority.

18. The spread code allocation method in a CDMA cellular as set forth in claim 1, wherein

said transmission signal includes a common control signal.

19. The spread code allocation method in a CDMA cellular as set forth in claim 1, wherein

said transmission signal includes a common control signal, and

to said common control signal, a combined code having the highest priority is allocated.

20. The spread code allocation method in a CDMA

cellular as set forth in claim 1, further comprising the step of,

at a plurality of said mobile stations, measuring  
5 a channel quality value and informing said base station of said channel quality value and at said base station, determining a priority of said combined code based on said channel quality value informed, wherein

an interference signal power is taken as said  
10 channel quality value.

21. The spread code allocation method in a CDMA cellular as set forth in claim 1, further comprising the step of,

at a plurality of said mobile stations, measuring  
5 a channel quality value and informing said base station of said channel quality value and at said base station, determining a priority of said combined code based on said channel quality value informed, wherein

a reception power of said common control signal  
10 is taken as said channel quality value.

22. The spread code allocation method in a CDMA cellular as set forth in claim 1, further comprising the step of,

at a plurality of said mobile stations, measuring  
5 a channel quality value and informing said base station of said channel quality value and at said base station,

determining a priority of said combined code based on  
said channel quality value informed, wherein

10        a power ratio of a desired signal to an  
interference signal is taken as said channel quality  
value.

23.        The spread code allocation method in a CDMA  
cellular as set forth in claim 1, further comprising the  
step of:

5        at a plurality of said mobile stations, measuring  
a channel quality value and informing said base station  
of said channel quality value and at said base station,  
determining a priority of said combined code based on  
said channel quality value informed, wherein

10        a power ratio of a desired signal to an  
interference signal is taken as said channel quality  
value, and further comprising the step of:

15        checking a reception power of a common control  
signal sent out from a base station being connected and  
a reception power of said common control signal sent out  
from a base station not being connected to calculate a  
power ratio of a desired signal to an interference  
signal from a ratio of a reception power corresponding  
to said base station being connected to a reception  
power corresponding to said base station not being  
20        connected.

24. The spread code allocation method in a CDMA cellular as set forth in claim 1, wherein  
as said first code set, a orthogonal code is used.

25. The spread code allocation method in a CDMA cellular as set forth in claim 1, wherein  
as said second code set, a gold code or a part of the gold code is used.

5 26. A base station in a CDMA cellular, comprising:  
a first code set including a plurality of first codes and a second code set including one or a plurality of second codes,

5 means for allocating said second code to said first code set and multiplying said plurality of first codes by said second code allocated to generate a plurality of combined codes,

10 means for assigning a priority to said combined code for each transmission signal to be transmitted from a base station to a mobile station,

means for allocating said combined code to said transmission signal based on said priority, and

15 means for diffusing said transmission signal by the allocated combined code to transmit said transmission signal diffused to said mobile station.

27. The base station in a CDMA cellular as set forth

in claim 26, wherein

said base station is informed of channel quality values measured at a plurality of said mobile stations to determine a priority of said combined code based on said channel quality values informed.

28. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of channel quality values measured at a plurality of said mobile stations to determine a priority of said combined code based on said channel quality values informed, and

sets a priority to said second code according to said channel quality value and sets a priority of said combined code to be higher as said second code attains a higher priority.

29. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of channel quality values measured at a plurality of said mobile stations to determine a priority of said combined code based on said channel quality values informed,

sets a priority to said second code according to said channel quality values and sets a priority of said combined code to be higher as said second code attains a higher priority, and



provides an axis of a channel quality value representing said channel quality value and divides the axis of a channel quality value by a plurality of threshold values to set a channel quality value within the same value area among a plurality of value areas generated by the division by said threshold values to have the same priority of said second code.

30. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of channel quality values measured at a plurality of said mobile stations and determines a priority of said combined code based on said channel quality values informed, and

sets a priority to said first code according to said channel quality value and sets a priority of each combined code in a group of combined codes including the same second code to be higher as said first code attains a higher priority.

31. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of channel quality values measured at a plurality of said mobile stations and determines a priority of said combined code based on said channel quality values informed,

sets a priority to said first code according to

10 said channel quality value and sets a priority of each combined code in a group of combined codes including the same second code to be higher as said first code attains a higher priority, and

15 provides an axis of a channel quality value representing said channel quality value and divides the axis of a channel quality value by a plurality of threshold values to set a channel quality value within the same value area among a plurality of value areas generated by the division by said threshold values to have the same priority of said first code.

32. The base station in a CDMA cellular as set forth in claim 26, wherein

5 said base station grasps a transmission quality required amount required by a mobile station receiving each said transmission signal to determine a priority of said combined code based on said transmission quality required amount.

33. The base station in a CDMA cellular as set forth in claim 26, wherein

5 said base station grasps a transmission quality required amount required by a mobile station receiving each said transmission signal to determine a priority of said combined code based on said transmission quality required amount, and

sets a priority to said second code according to  
said transmission quality required amount and sets a  
priority of said combined code to be higher as said  
second code attains a higher priority.

34. The base station in a CDMA cellular as set forth  
in claim 26, wherein

said base station grasps a transmission quality  
required amount required by a mobile station receiving  
each said transmission signal to determine a priority of  
said combined code based on said transmission quality  
required amount,

sets a priority to said second code according to  
said transmission quality required amount and sets a  
priority of said combined code to be higher as said  
second code attains a higher priority, and

provides an axis of a transmission quality  
required amount representing said transmission quality  
required amount and divides the axis of a transmission  
quality required amount by a plurality of threshold  
values to set a transmission quality required amount  
within the same value area among a plurality of value  
areas generated by the division by said threshold values  
to have the same priority of said second code.

35. The base station in a CDMA cellular as set forth  
in claim 26, wherein

said base station grasps a transmission quality  
required amount required by a mobile station receiving  
each said transmission signal to determine a priority of  
said combined code based on said transmission quality  
required amount, and

sets a priority to said first code according to  
said transmission quality required amount and sets a  
priority of each combined code in a group of said  
combined codes including the same second code to be  
higher as said first code attains a higher priority.

36. The base station in a CDMA cellular as set forth  
in claim 26, wherein

said base station grasps a transmission quality  
required amount required by a mobile station receiving  
each said transmission signal to determine a priority of  
said combined code based on said transmission quality  
required amount,

sets a priority to said first code according to  
said transmission quality required amount and sets a  
priority of each combined code in a group of said  
combined codes including the same second code to be  
higher as said first code attains a higher priority, and

provides an axis of a transmission quality  
required amount representing said transmission quality  
required amount and divides the axis of a transmission  
quality required amount by a plurality of threshold

values to set a transmission quality required amount within the same value area among a plurality of value areas generated by the division by said threshold values to have the same priority of said first code.

37. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of a channel quality value measured at said mobile station, and checks the number of uses of each second code by a combined code including the same second code and determines a priority of said combined code based on said channel quality value informed and said number of uses of each second code.

38. The base station in a CDMA cellular as set forth in claim 26, wherein

said base station is informed of a channel quality value measured at said mobile station, checks the number of uses of each second code by a combined code including the same second code and determines a priority of said combined code based on said channel quality value informed and said number of uses of each second code,

when said channel quality value is not less than a quality threshold value, sets a priority of a combined code to be higher that includes a second code whose said

number of uses of each second code by said combined code is smaller, and

15           when said channel quality value is less than said quality threshold value, sets a priority of a combined code to be higher that includes a second code whose said number of uses of each second code by said combined code is larger.

20

39.       The base station in a CDMA cellular as set forth in claim 26, wherein


          said base station is informed of a channel quality value measured at said mobile station,

5           checks the number of uses of each second code by a combined code including the same second code and determines a priority of said combined code based on said channel quality value informed and said number of uses of each second code, and



10           sets a priority to said first code and sets a priority of each combined code in a group of combined codes including the same second code to be higher as said first code attains a higher priority.

ABSTRACT OF THE DISCLOSURE

A spread code allocation method in a CDMA cellular having a first code set including a plurality of first codes and a second code set including one or a plurality of second codes, allocating the second code to the first code set and multiplying the plurality of first codes by the allocated second code to generate a plurality of combined codes, assigning a priority to the combined code for each transmission signal to be transmitted from a base station to a mobile station, allocating the combined code to the transmission signal based on the priority, and diffusing the transmission signal by the allocated combined code to transmit the diffused transmission signal to the mobile station.

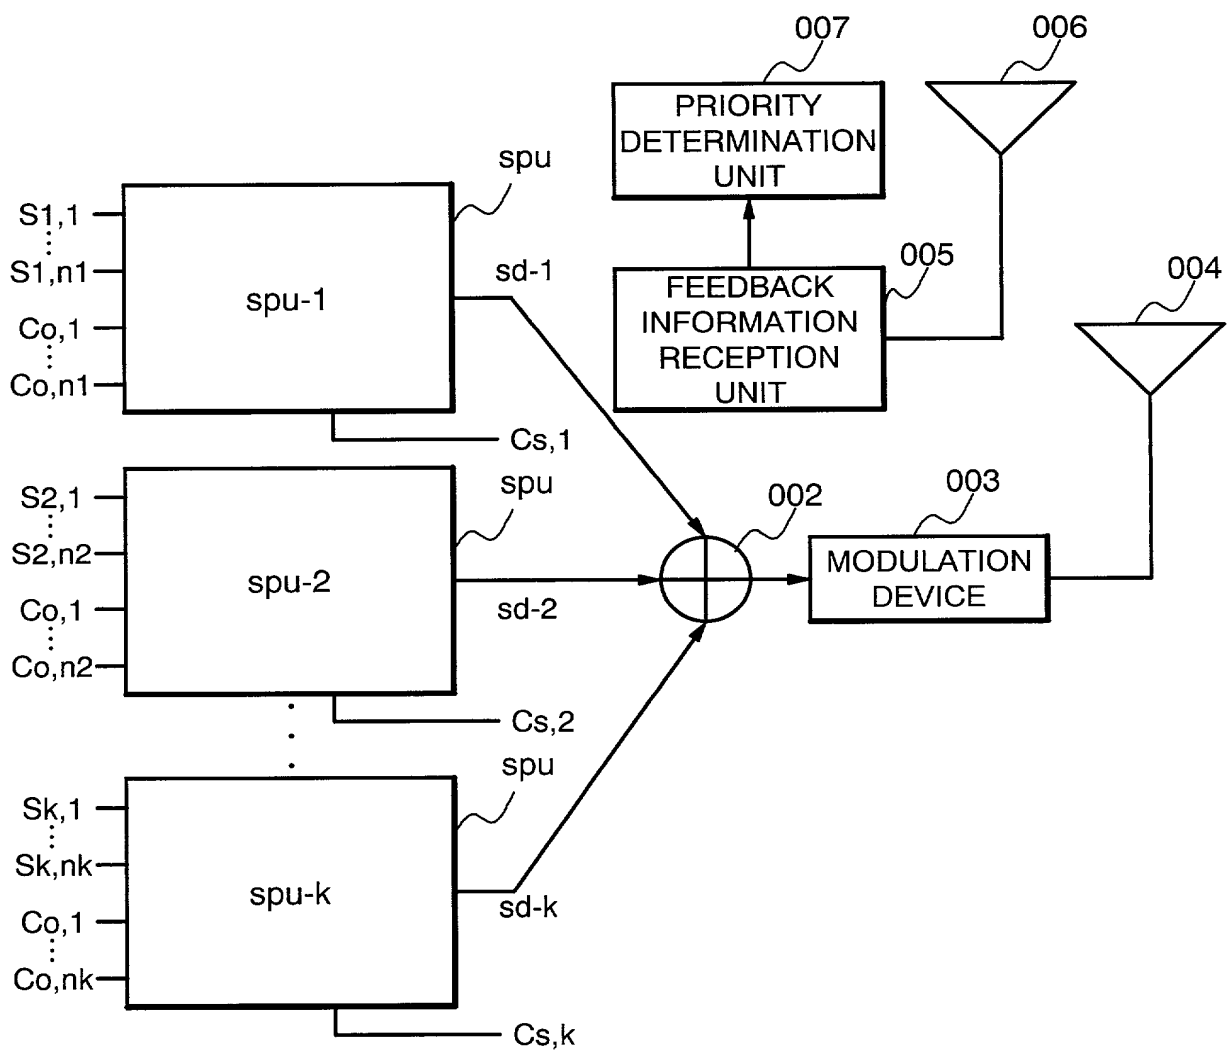**FIG. 1**

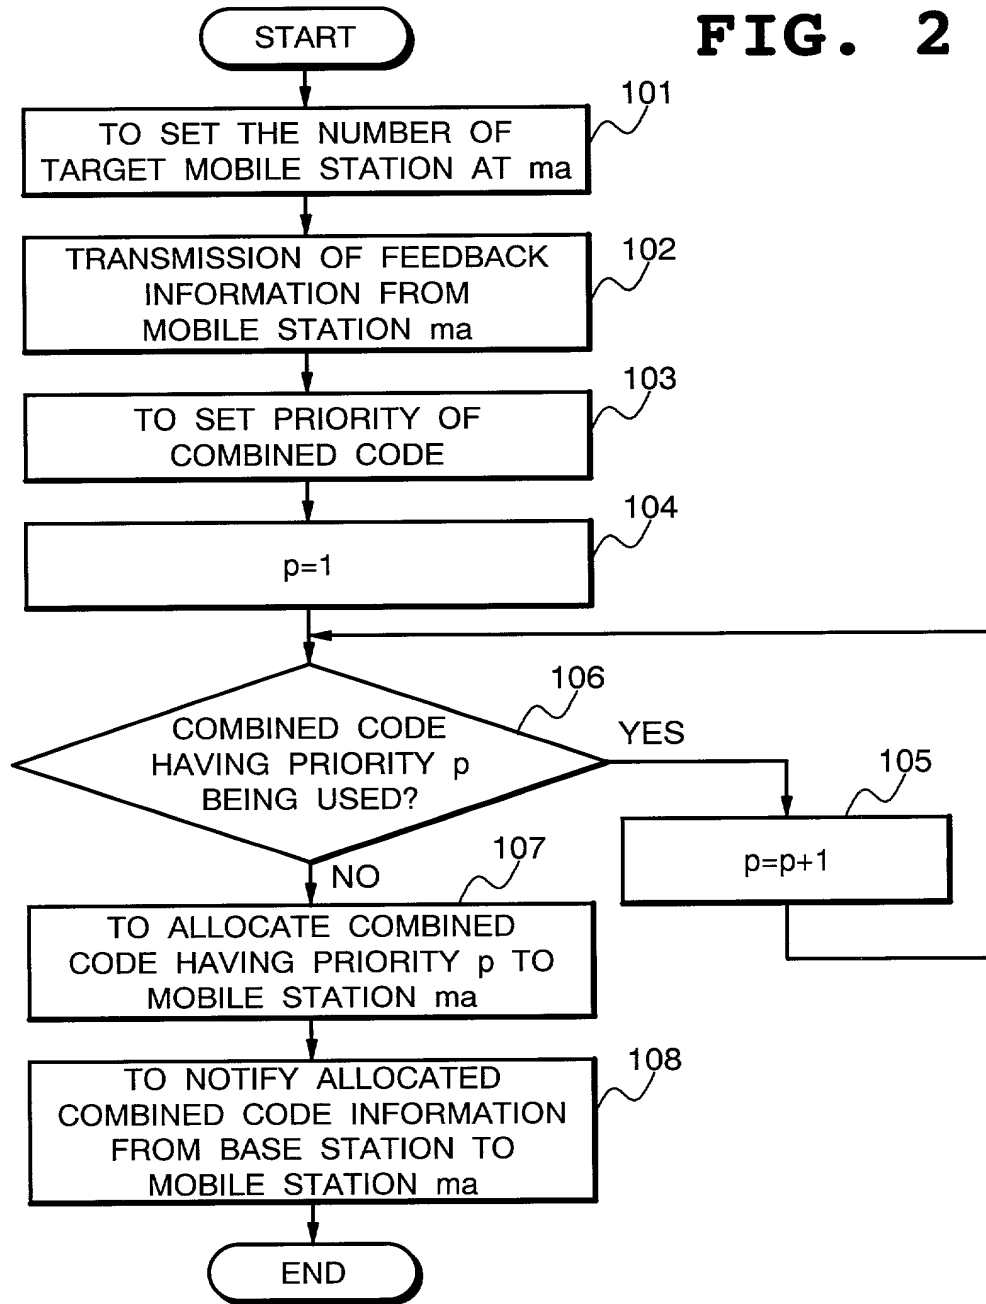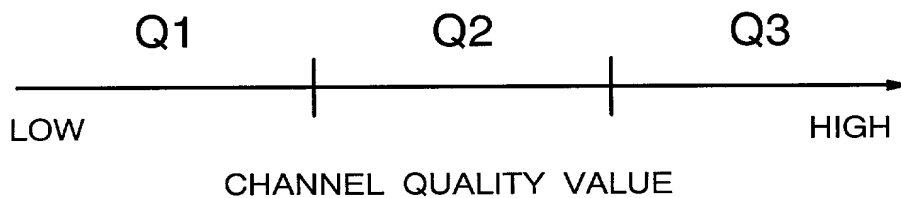

**FIG. 2****FIG. 3**

**FIG. 4**

SCRAMBLE CODE NUMBER

ORTHOGONAL CODE NUMBER	SCRAMBLE CODE NUMBER		
	1	2	...
1	7	11	...
2	2	16	...
3	8	14	...
4	1	9	...
5	4	13	...
6	6	10	...
7	3	12	...
8	5	15	...

(a) CHANNEL QUALITY VALUE CLASS Q1

SCRAMBLE CODE NUMBER

ORTHOGONAL CODE NUMBER	SCRAMBLE CODE NUMBER		
	1	2	...
1	11	7	...
2	16	2	...
3	14	8	...
4	9	1	...
5	13	4	...
6	10	6	...
7	12	3	...
8	15	5	...

(b) CHANNEL QUALITY VALUE CLASS Q2

# FIG. 5

		SCRAMBLE CODE NUMBER		
		1	2	...
ORTHOGONAL CODE NUMBER	1	1	9	...
	2	2	10	...
	3	3	11	...
	4	4	12	...
	5	5	13	...
	6	6	14	...
	7	7	15	...
	8	8	16	...

(a) CHANNEL QUALITY VALUE CLASS Q1

		SCRAMBLE CODE NUMBER		
		1	2	...
ORTHOGONAL CODE NUMBER	1	9	1	...
	2	10	2	...
	3	11	3	...
	4	12	4	...
	5	13	5	...
	6	14	6	...
	7	15	7	...
	8	16	8	...

(b) CHANNEL QUALITY VALUE CLASS Q2

FIG. 6

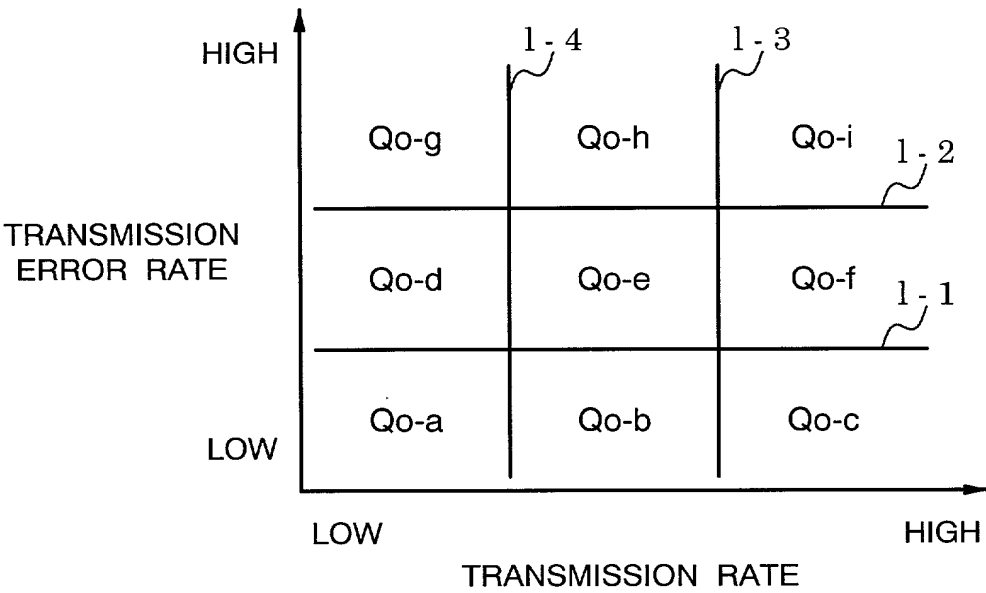


FIG. 7

		SCRAMBLE CODE NUMBER		
		1	2	...
ORTHOGONAL CODE NUMBER	1	7	11	...
	2	2	16	...
	3	8	14	...
	4	1	9	...
	5	4	13	...
	6	6	10	...
	7	3	12	...
	8	5	15	...

(a) TRANSMISSION SIGNAL OF TRANSMISSION  
QUALITY REQUIRED AMOUNT CLASS Q0-a

		SCRAMBLE CODE NUMBER		
		1	2	...
ORTHOGONAL CODE NUMBER	1	5	1	...
	2			
	3	8	3	...
	4			
	5	7	2	...
	6			
	7	6	4	...
	8			

(b) TRANSMISSION SIGNAL OF TRANSMISSION  
QUALITY REQUIRED AMOUNT CLASS Q0-b

FIG. 8

ORTHOGONAL  
CODE NUMBER

SCRAMBLE CODE NUMBER			
	1	2	...
1	1	9	...
2	2	10	...
3	3	11	...
4	4	12	...
5	5	13	...
6	6	14	...
7	7	15	...
8	8	16	...

(a) TRANSMISSION SIGNAL OF TRANSMISSION  
QUALITY REQUIRED AMOUNT CLASS Q0-a

ORTHOGONAL  
CODE NUMBER

SCRAMBLE CODE NUMBER			
	1	2	...
1	5	1	...
2			
3	6	2	...
4			
5	7	3	...
6			
7	8	4	...
8			

(b) TRANSMISSION SIGNAL OF TRANSMISSION  
QUALITY REQUIRED AMOUNT CLASS Q0-b

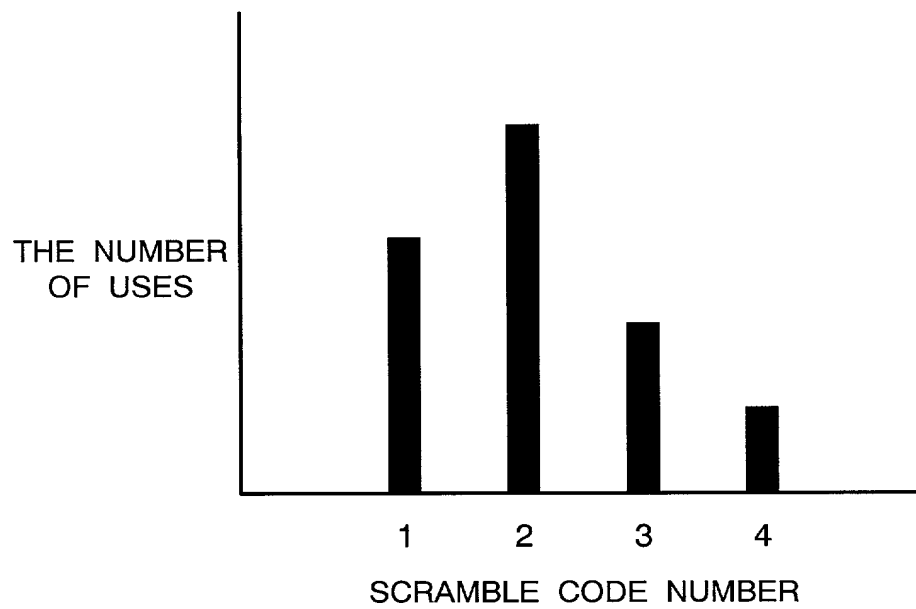
**FIG. 9**

FIG. 10

		SCRAMBLE CODE NUMBER			
		1	2	3	4
ORTHOGONAL CODE NUMBER	1	22	32	9	2
	2	20	26	14	7
	3	19	30	13	3
	4	24	31	15	4
	5	21	25	11	6
	6	18	27	16	5
	7	23	29	12	1
	8	17	28	10	8

(a) CHANNEL QUALITY VALUE  $\geq$  QUALITY THRESHOLD VALUE

		SCRAMBLE CODE NUMBER			
		1	2	3	4
ORTHOGONAL CODE NUMBER	1	9	2	22	32
	2	14	7	20	26
	3	13	3	19	30
	4	15	4	24	31
	5	11	6	21	25
	6	16	5	18	27
	7	12	1	23	29
	8	10	8	17	28

(b) CHANNEL QUALITY VALUE  $<$  QUALITY THRESHOLD VALUE




**FIG. 11**


		SCRAMBLE CODE NUMBER			
		1	2	3	4
ORTHOGONAL CODE NUMBER	1	17	25	9	1
	2	18	26	10	2
	3	19	27	11	3
	4	20	28	12	4
	5	21	29	13	5
	6	22	30	14	6
	7	23	31	15	7
	8	24	32	16	8

(a) CHANNEL QUALITY VALUE  $\geq$  QUALITY THRESHOLD VALUE

		SCRAMBLE CODE NUMBER			
		1	2	3	4
ORTHOGONAL CODE NUMBER	1	9	1	17	25
	2	10	2	18	26
	3	11	3	19	27
	4	12	4	20	28
	5	13	5	21	29
	6	14	6	22	30
	7	15	7	23	31
	8	16	8	24	32

(b) CHANNEL QUALITY VALUE  $<$  QUALITY THRESHOLD VALUE

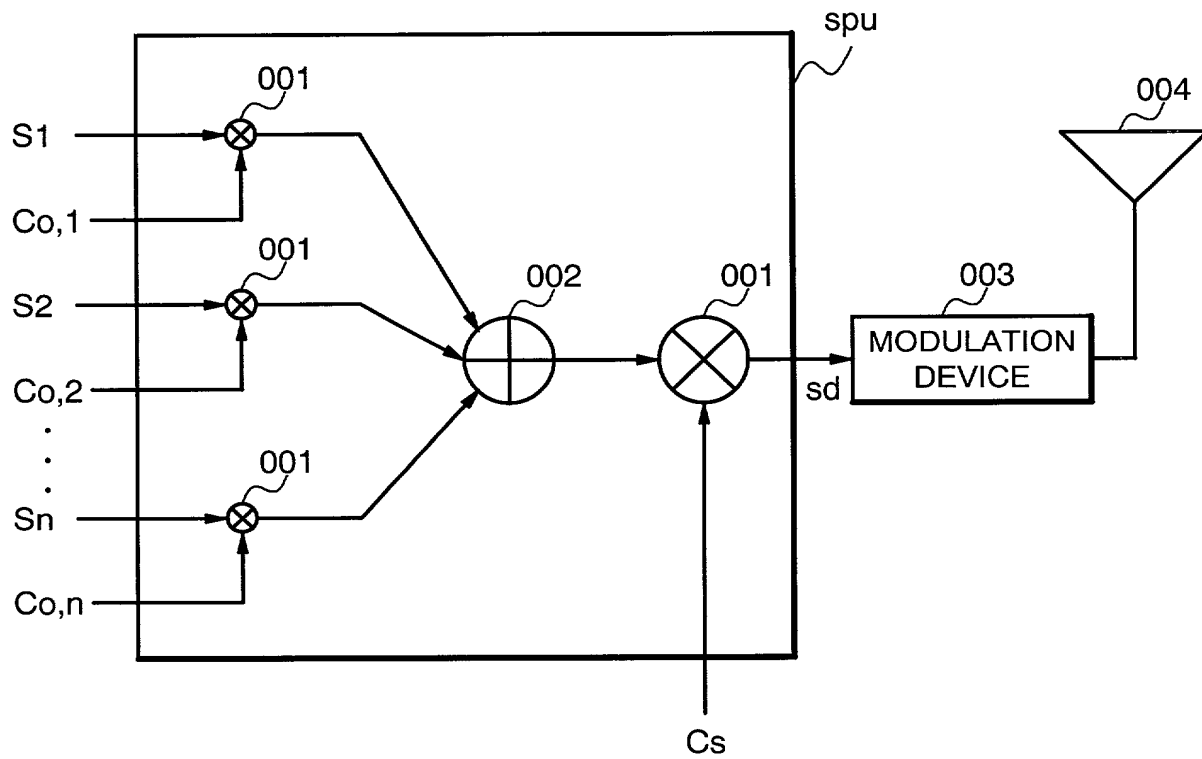**FIG. 12** (PRIOR ART)

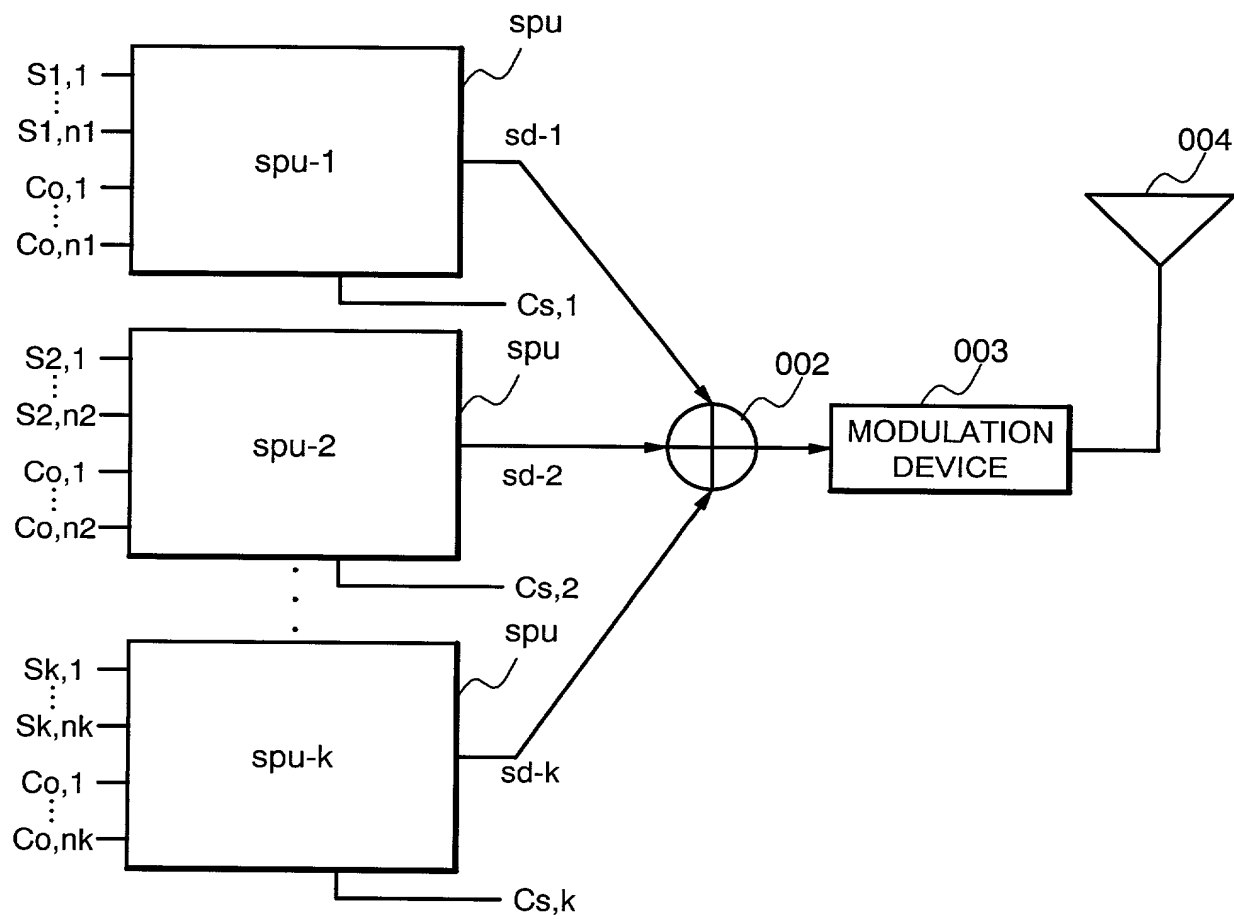**FIG. 13** (PRIOR ART)

UNITED STATES OF AMERICA COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION		OFGS FILE NO. P/1912-18	
<p>As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named) of the subject matter which is claimed and for which a patent is sought on the invention entitled:</p> <p><b>SPREAD CODE ALLOCATION METHOD AND BASE STATION IN CDMA CELLULAR</b></p>			
<p>the specification of which is attached hereto, unless the following box is checked:</p> <p><input type="checkbox"/> was filed on _____ as United States patent Application Number or PCT International patent Number _____ and was amended on _____ (if any).</p>			
<p>I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.</p> <p>I acknowledge the duty to disclose all information known to be material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.</p> <p>I hereby claim priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate or United States provisional application(s) listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:</p>			
Prior Foreign or Provisional Application(s)			
COUNTRY	APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	PRIORITY CLAIMED UNDER 35 U.S.C. 119
Japan	311603/1999	1, November, 1999	YES <u>X</u> NO _____
			YES _____ NO _____
			YES _____ NO _____
<p>I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.</p>			
UNITED STATES APPLICATION NUMBER	DATE OF FILING <small>(day, month, year)</small>	STATUS <small>(patented, pending, abandoned)</small>	
<p>I hereby appoint OSTROLENK, FABER, GERB &amp; SOFFEN, and the members of the firm, Marvin C. Soffen - Reg. No. 17,542; Samuel H. Weiner - Reg. No. 18,510; Jerome M. Berliner - Reg. No. 18,653; Robert C. Faber - Reg. No. 24,322; Edward A. Meilman - Reg. No. 24,735; Stanley H. Lieberstein - Reg. No. 22,400; Steven I. Weisburd - Reg. No. 27,409; Max Moskowitz - Reg. No. 30,576; Stephen A. Soffen - Reg. No. 31,063; James A. Finder - Reg. No. 30,173; William O. Gray, III - Reg. No. 30,944 and Louis C. Dujmich - Reg. No. 30,625, as attorneys with full power of substitution and revocation to prosecute this application, to transact all business in the Patent &amp; Trademark Office connected herewith and to receive all correspondence.</p>			
<p>SEND CORRESPONDENCE TO:</p> <p>OSTROLENK, FABER, GERB &amp; SOFFEN 1180 AVENUE OF THE AMERICAS NEW YORK, NEW YORK 10036-8403</p>		<p>DIRECT TELEPHONE CALLS TO:</p> <p>(212) 382-0700</p>	
<p>I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.</p>			
<p>FULL NAME OF SOLE OR FIRST INVENTOR</p> <p>Hiroshi FURUKAWA</p>		<p>INVENTOR'S SIGNATURE</p> <p><i>Hiroshi Furukawa</i> (Seal)</p>	<p>DATE</p> <p>Oct. 23, 2000</p>
<p>RESIDENCE</p> <p>Tokyo, Japan</p>		<p>COUNTRY OF CITIZENSHIP</p> <p>Japanese</p>	
<p>POST OFFICE ADDRESS</p> <p>c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan</p>			
<p>FULL NAME OF SECOND JOINT INVENTOR (IF ANY)</p> <p>Akihisa USHIROKAWA</p>		<p>INVENTOR'S SIGNATURE</p> <p><i>Akihisa Ushirokawa</i> (Seal)</p>	<p>DATE</p> <p>Oct. 23, 2000</p>
<p>RESIDENCE</p> <p>Tokyo, Japan</p>		<p>COUNTRY OF CITIZENSHIP</p> <p>Japanese</p>	
<p>POST OFFICE ADDRESS</p> <p>c/o NEC Corporation, 7-1, Shiba 5-chome, Minato-ku, Tokyo, Japan</p>			
<p>FULL NAME OF THIRD JOINT INVENTOR (IF ANY)</p>		<p>INVENTOR'S SIGNATURE</p>	<p>DATE</p>
<p>RESIDENCE</p>		<p>COUNTRY OF CITIZENSHIP</p>	
<p>POST OFFICE ADDRESS</p>			